

CG118-100CF

Comb Generator

Description

CG118-100CF Comb Generator serves as a versatile signal source, emitting radiated reference signals, and available directly via its connector as a conducted signal source. Equipped with an accompanying antenna, it functions as a self-contained signal generator, producing frequency harmonics at 100MHz intervals, usable within the range of 1GHz up to at least 18GHz. Power options include a rechargeable internal battery and an external power cable connection, enabling continuous operation for up to 8 hours when fully charged. Accessories such as a battery charger, USB cable, antennas, and additional components are packaged within a storage box.

Application

The main purpose of a Comb Generator is to efficiently validate setups for conducted & radiated emissions testing. Its primary application lies in troubleshooting Open Area Test Sites (OATS) or chambers, where calibration is crucial before deployment for effective operation.

With the Comb Generator, test engineers can quickly and frequently verify the conducted & radiated test setup, ensuring the reliability of results. For example, issues or changes in the antenna, attenuator, or receiver are easily identified in the Comb Generator data using the same setup. This approach is useful when EMC emissions measurements for a product show variations across different testing sites.

The Comb Generator is instrumental in determining whether the variation in EMC emissions measurements is due to the test sites.


Beyond these functions, the Comb Generator is also utilized to assess the shielding effectiveness and resonance performance of enclosures designed for electronic equipment.




Specifications

Frequency Range	1GHz - 18GHz @ 3m
Frequency Step	100MHz
Power Requirements	USB mini, +5 Vdc
Output Connectors	50 ohm, SMA Female
Charging Time	8 - 10 Hours
Usage Time	8 Hours
Size (mm * mm * mm)	119 * 81.5 * 85.5
Net Weight	1 kg


Dimensions

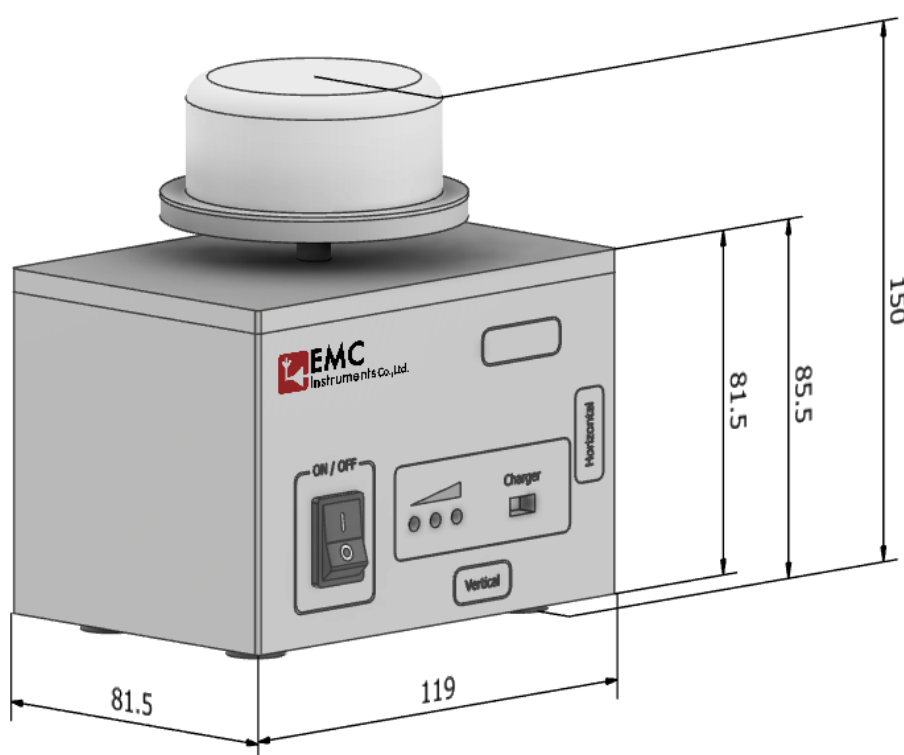

- **Vertical**

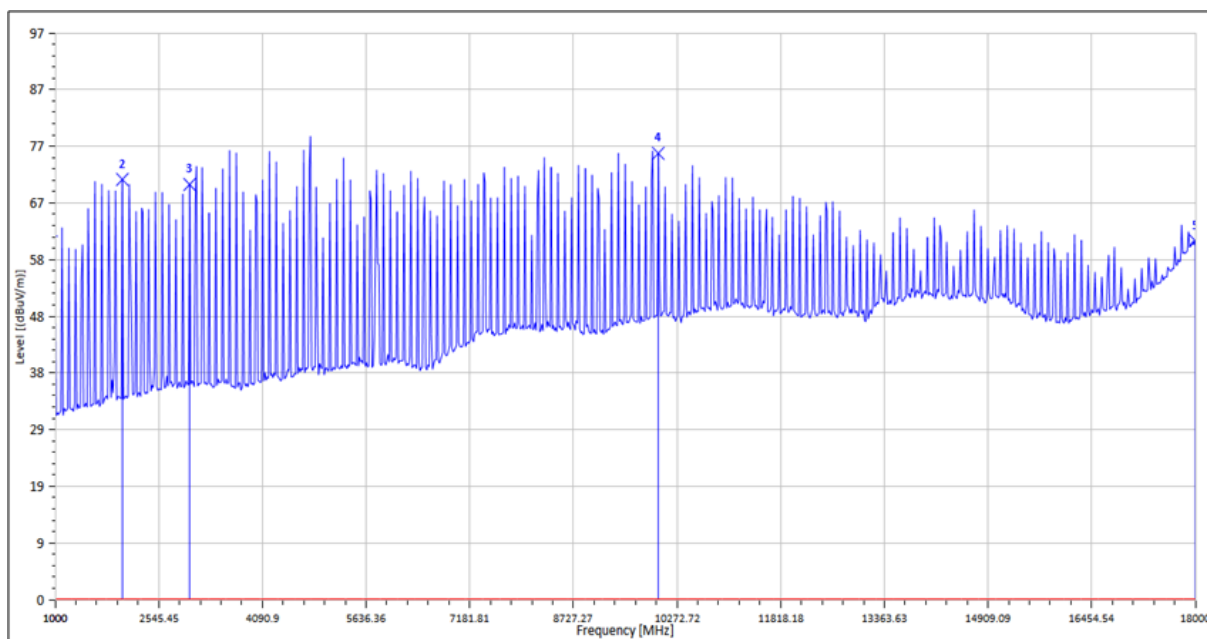

- **Horizontal**

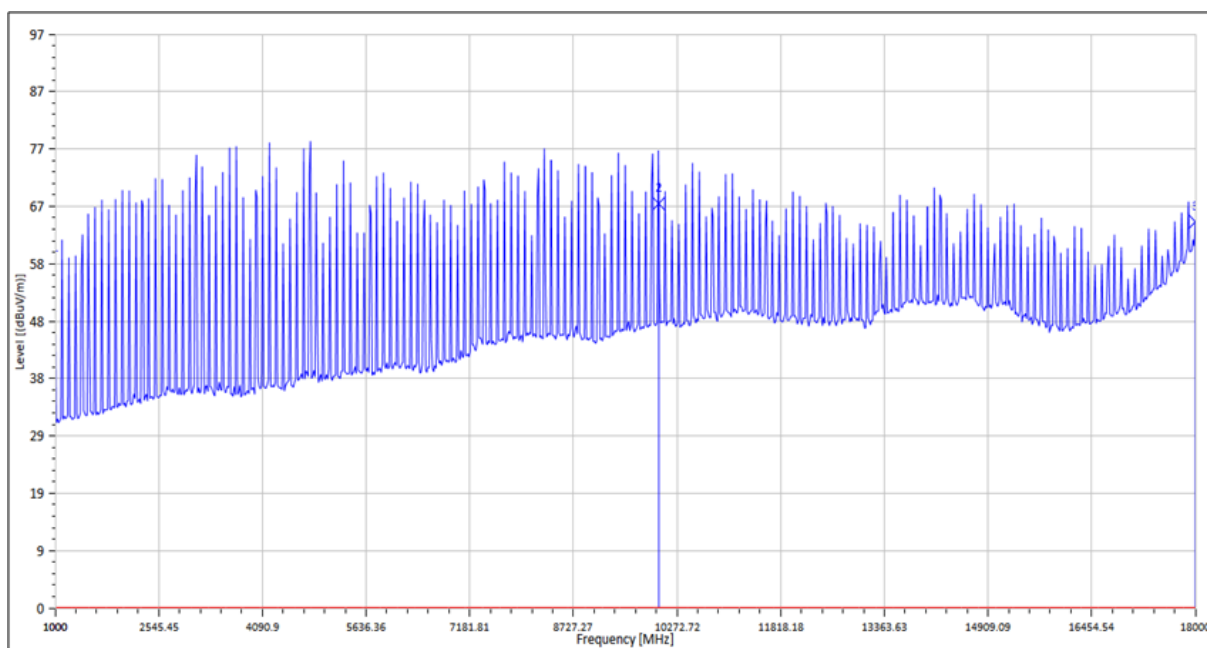



承儀電子股份有限公司

地址：桃園市龜山區文三三街 38 巷 8 號 1 樓

電話：+886-3-328-6998

傳真：+886-3-328-8376

手機：+886-937-214-592

電子郵件：steven@emci.com.tw

EMC Instruments Corporation

Address: 1F., No. 8, Ln. 38, Wen 33rd St., Guishan Dist., Taoyuan City 333010, Taiwan

TEL: +886-3-328-6998

FAX: +886-3-328-8376

Mobile: +886-937-214-592

E-mail: steven@emci.com.tw

